
SAIP2016

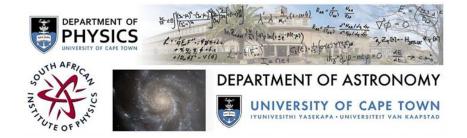

Contribution ID: 451 Type: Oral Presentation

Modelling of a 2 micron cladding-pumped cw Tm-doped silica fibre laser

Friday, 8 July 2016 09:40 (20 minutes)

Abstract content
 (Max 300 words)
 dry-Formatting &
 &class="blank">Formatting &class="blan

This work reports on the development of a model, using proprietary simulation software, for the design of large mode area diode-cladding-pumped 2mu;m Tm-doped fibre lasers. Mid-IR fibre lasers have a number of interesting applications from remote sensing, eye-safe LIDAR, non-linear frequency conversion, materials processing, to medical and defence applications.

The rate equations are solved using published spectroscopic data for a 3-level Tm³⁺-ion system hosted in an aluminosilicate glass. The doped fibre is optically pumped with a ~790nm diode source, thereby exploiting the "two-for-one" cross-relaxation (CR) process. Comparison of the simulated results in terms of the pump threshold, output power, slope efficiency and free-running wavelength showed very good agreement with the Tm:silica fibre laser constructed in our laboratory.

Apply to be < br > considered for a student < br > award (Yes / No)?

nc

Level for award

- (Hons, MSc,

- PhD, N/A)?

n/a

Would you like to
 submit a short paper
 for the Conference
 Proceedings (Yes / No)?

nc

Please indicate whether

br>this abstract may be

br>published online

(Yes / No)

yes

Primary author: Dr WU, Lorinda (CSIR-NLC)

Co-author: Mr MORRIS, Daniel (University of Pretoria)

Presenter: Dr WU, Lorinda (CSIR-NLC)Session Classification: Photonics

Track Classification: Track C - Photonics